

# LUXURY VINYL PLANKS



 **BelgotexVinyl™**





# What are Luxury Vinyl Planks?

Luxury vinyl tiles or luxury vinyl planks (also known as LVTs or LVPs) are the fastest growing category in flooring internationally, offering the natural good looks of wooden floors combined with the latest technological advances for enhanced durability and performance.

LVPs from Belgotex provide high-quality fashionable and convenient flooring solutions, with various installation methods suited to different applications. We pride ourselves on offering the latest innovations in high quality luxury vinyl flooring – from superior raw materials using only virgin PVC for dimensional stability, to a fibre-glass scrim and thicker wear layers for added durability, and the innovative pressure-sensitive adhesive backing for the newest installation method.

Using only virgin PVC to eliminate impurities and improve durability and structural integrity, Belgotex LVPs are engineered for stability, durability and convenience.

Our LVPs DO NOT contain recycled materials which although cheaper, often contain hazardous by-products or heavy metals known to be harmful to health and compromise performance. Recycled content often fails in hot, humid conditions like South Africa, losing integrity which results in reduced mass density, dimensional stability and joint strength. The virgin PVC is rigorously tested, guaranteeing safety, superior density and heat resistance, while the fibre glass mesh provides added stability when exposed to heat or sunlight.

## CONTENTS

### CLIC SYSTEM VINYL

Benefits & Structure of the plank	3 – 4
Arlington	5 – 6
Oakland	7 – 8
Vibe	9 – 10

### PRESSURE SENSITIVE VINYL

Benefits & Structure of the plank	11 – 12
Nottingham	13 – 14


### STICK-DOWN VINYL

Benefits & Structure of the plank	15 – 16
Charleston	17 – 18
Davenport	19 – 20
Plank Colour Variation	21




## BENEFITS OF THE CLIC VINYL

- Glue-less installation
- Hard wearing in specific application
- Moisture resistant
- Ease of maintenance
- Low noise levels
- Good heat insulator
- Scratch resistant
- Stain resistant
- Cost effective
- Natural look
- Limited expansion/contraction
- UV stable
- Great colour selection

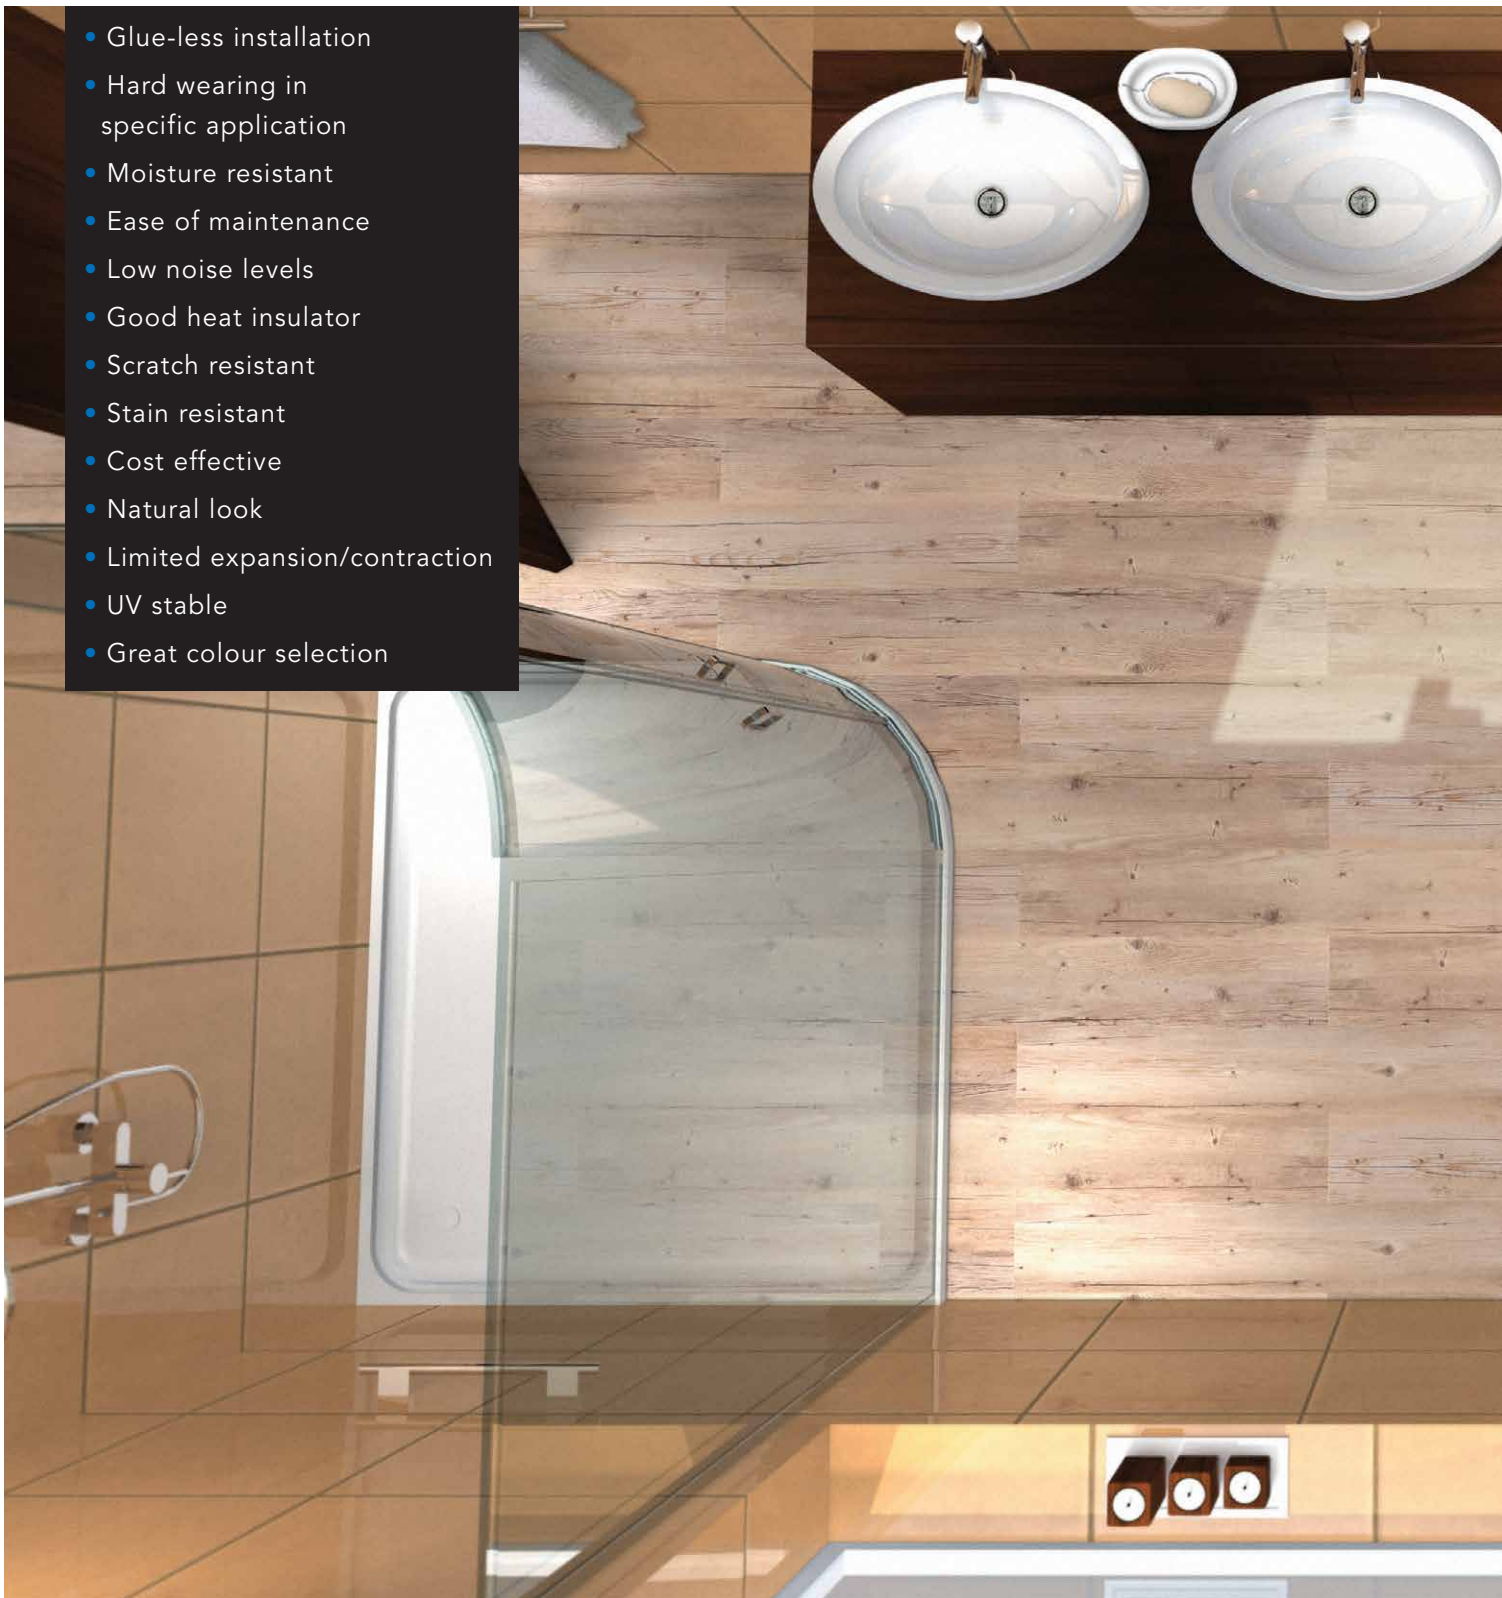

# STRUCTURE OF THE CLIC SYSTEM VINYL PLANK

- A WEAR LAYER**  
Antimicrobial  
Antibacterial  
Slip resistant coating  
Easy cleaning  
100% water-resistant
- B DECORATIVE PAPER**  
Unique designs
- C STABILITY LAYER**  
Fibreglass scrim for stability
- D BACKING LAYER**  
Sound absorbing quality  
Stable and indentation resistant  
Textured grip backing  
Fibreglass scrim for stability  
No-glue clic system

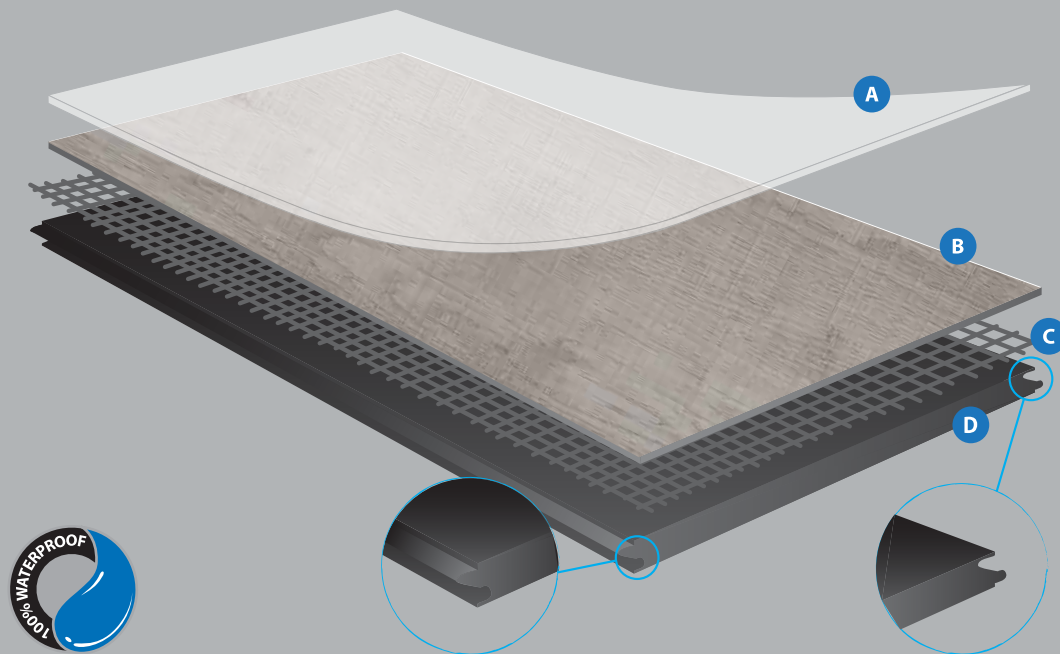





In an effort to offer flexibility and freedom of choice, the ARLINGTON range offers dynamic colours and textures, guaranteed to transform any floor into a masterpiece. ARLINGTON features the ever popular clic system which allows for speedy installation without the use of glue.

178.1 x 1244.6MM • CLIC SYSTEM





# ARLINGTON



BUCKTHORN

Type of Installation	Floating Floor (Clic System)
Application	Heavy Commercial
Wear Layer	0.55mm
Fire Resistance	B (fl) s1 (EN 13501-1)
Stain & Chemical Resistance	Excellent (EN 423)
Overall Thickness	5mm
Plank Size	178.1mm x 1244.6mm
Quantity per Box	1.77m <sup>2</sup>
Number of Planks	8 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)
VOC Tested	Floorscore SCS-FS-03336
Castor Chair	Pass (EN 425) (use soft non-staining wheels)



ISO 9001  
ISO 14001



SCS Certified

C 2538

178.1 x 1244.6MM • CLIC SYSTEM

Bring the natural beauty of nature into your home with the stunning new OAKLAND range. From the latest trends of whitewashed greys to earthy hues, your home will earn the reputation of a trendsetter. The extremely strong clic system, allows for rapid installation without the use of glue.



# OAKLAND



SWAMP CHESTNUT OAK

Type of Installation	Floating Floor (Clic System)
Application	Heavy Residential
Wear Layer	0.3mm
Fire Resistance	B (fl) s1 (EN 13501-1)
Stain & Chemical Resistance	Excellent (EN 423)
Overall Thickness	4mm
Plank Size	178.1mm x 1244.6mm
Quantity per Box	2.22m <sup>2</sup>
Number of Planks	10 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)
VOC Tested	Floorscore SCS-FS-03336
Castor Chair	Pass (EN 425) (use soft non-staining wheels)





907.8 x 298.2MM • CLIC SYSTEM



VIBE Luxury Vinyl Planks are a luxurious floating floor incorporating a clic locking system. Vibe featured extra wide tiles and fresh designs and colourways. With a 0,7mm wear layer and 5mm thickness, VIBE is suitable for heavy commercial areas in buildings and is easy to install and maintain.



# VIBE



CARAMEL  
SUNDAE

HERBAL TEA

RICE PAPER

STONE BRIDGE



HERBAL TEA



CARAMEL SUNDAE

Type of Installation	Clic System
Application	Heavy Commercial
Wear Layer	0.7mm
Fire Resistance	B (fl) s1 (EN 13501-1)
Stain & Chemical Resistance	Excellent (EN 423)
Overall Thickness	5mm
Plank Size	907.8mm x 298.2mm
Quantity per Box	1.6242m <sup>2</sup>
Number of Planks	6 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	R9 (DIN 51130)
Residual Indentation	0.1mm (EN433)
VOC Tested	Floorscore SCS-EC10.2-2007
Castor Chair	Pass (EN 425) (use soft non-staining wheels)



## BENEFITS OF TACBAC™

TACBAC™ is a revolutionary new backing system which Belgotex Vinyl™ is proud to launch. This loose-lay backing system means there is no need to glue the product to the screed or to clic the product together. The secret behind this product is the resin impregnated textile which allows the product to make solid contact with the floor without it being permanent.


TACBAC™ is proven to be one of the most dimensionally stable products on offer. With TACBAC you eliminate the need for adhesives, which means a more cost effective product for you, the consumer. Due to TACBAC™ being a permanently tacky system, you can easily uplift and re-install this product which makes it truly versatile. With no clic and no glue you can access panels when need be, at ease.

This backing system has a layer of fibre glass within it, which means it is one of the most dimensionally stable products on the market.





# STRUCTURE OF THE PRESSURE SENSITIVE VINYL PLANK

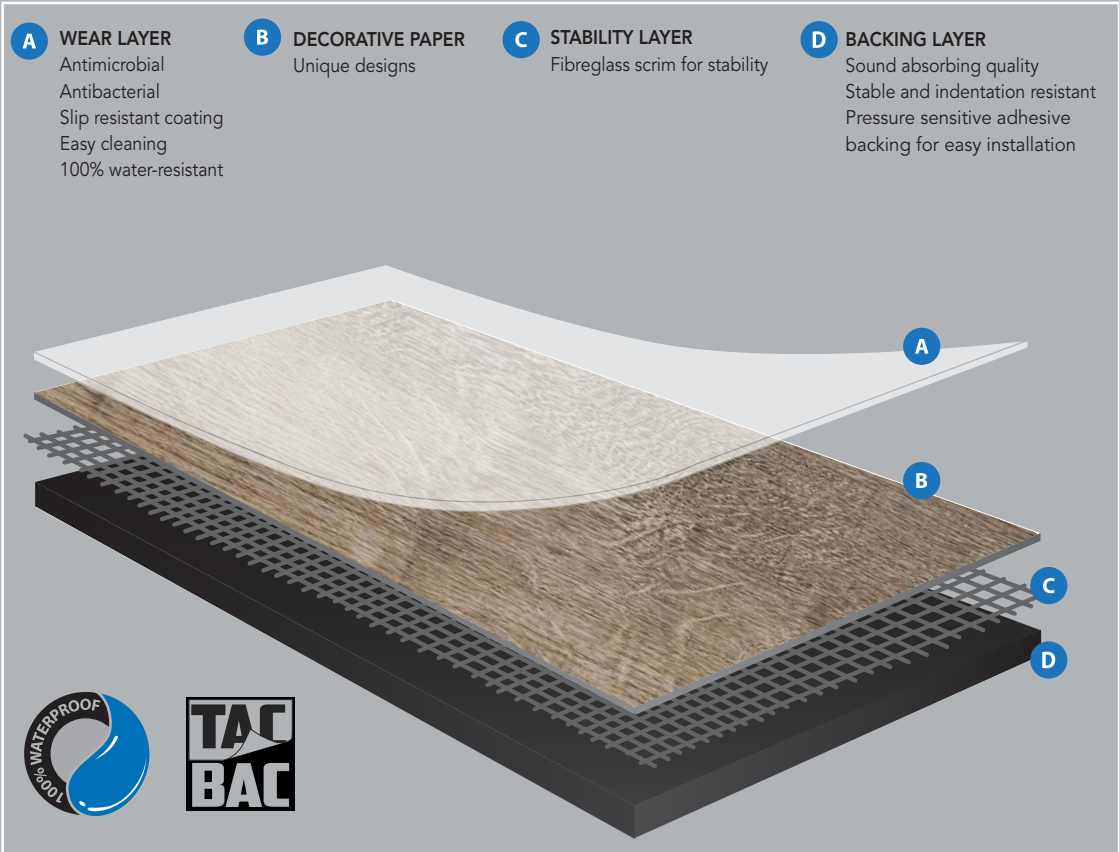

184.15 x 1219.2MM • PRESSURE SENSITIVE

Inspired by the earthy tones of nature, the NOTTINGHAM range is naturally authentic while offering the benefits of durability and stability. NOTTINGHAM features the revolutionary new TACBAC™ installation system and together with the dynamic designs and colours will transform any floor, with sophistication, yet retaining its natural charm.



# NOTTINGHAM




Type of Installation	Loose Lay
Application	Heavy Commercial
Wear Layer	0.55mm
Fire Resistance	B (fl) s1 (EN 13501-1)
Stain & Chemical Resistance	Excellent (EN 423)
Overall Thickness	4mm
Plank Size	184.15mm x 1219.2mm
Quantity per Box	2.25m <sup>2</sup>
Number of Planks	10 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)
VOC Tested	Floorscore SCS-FS-03336
Castor Chair	Pass (EN 425) (use soft non-staining wheels)



## BENEFITS OF STICK-DOWN VINYL

- Hard wearing in specific application
- Moisture resistant
- Ease of maintenance
- Low noise levels
- Good heat insulator
- Scratch resistant
- Stain resistant
- Cost effective
- Natural look
- Limited expansion/contraction
- UV stable
- Great colour selection

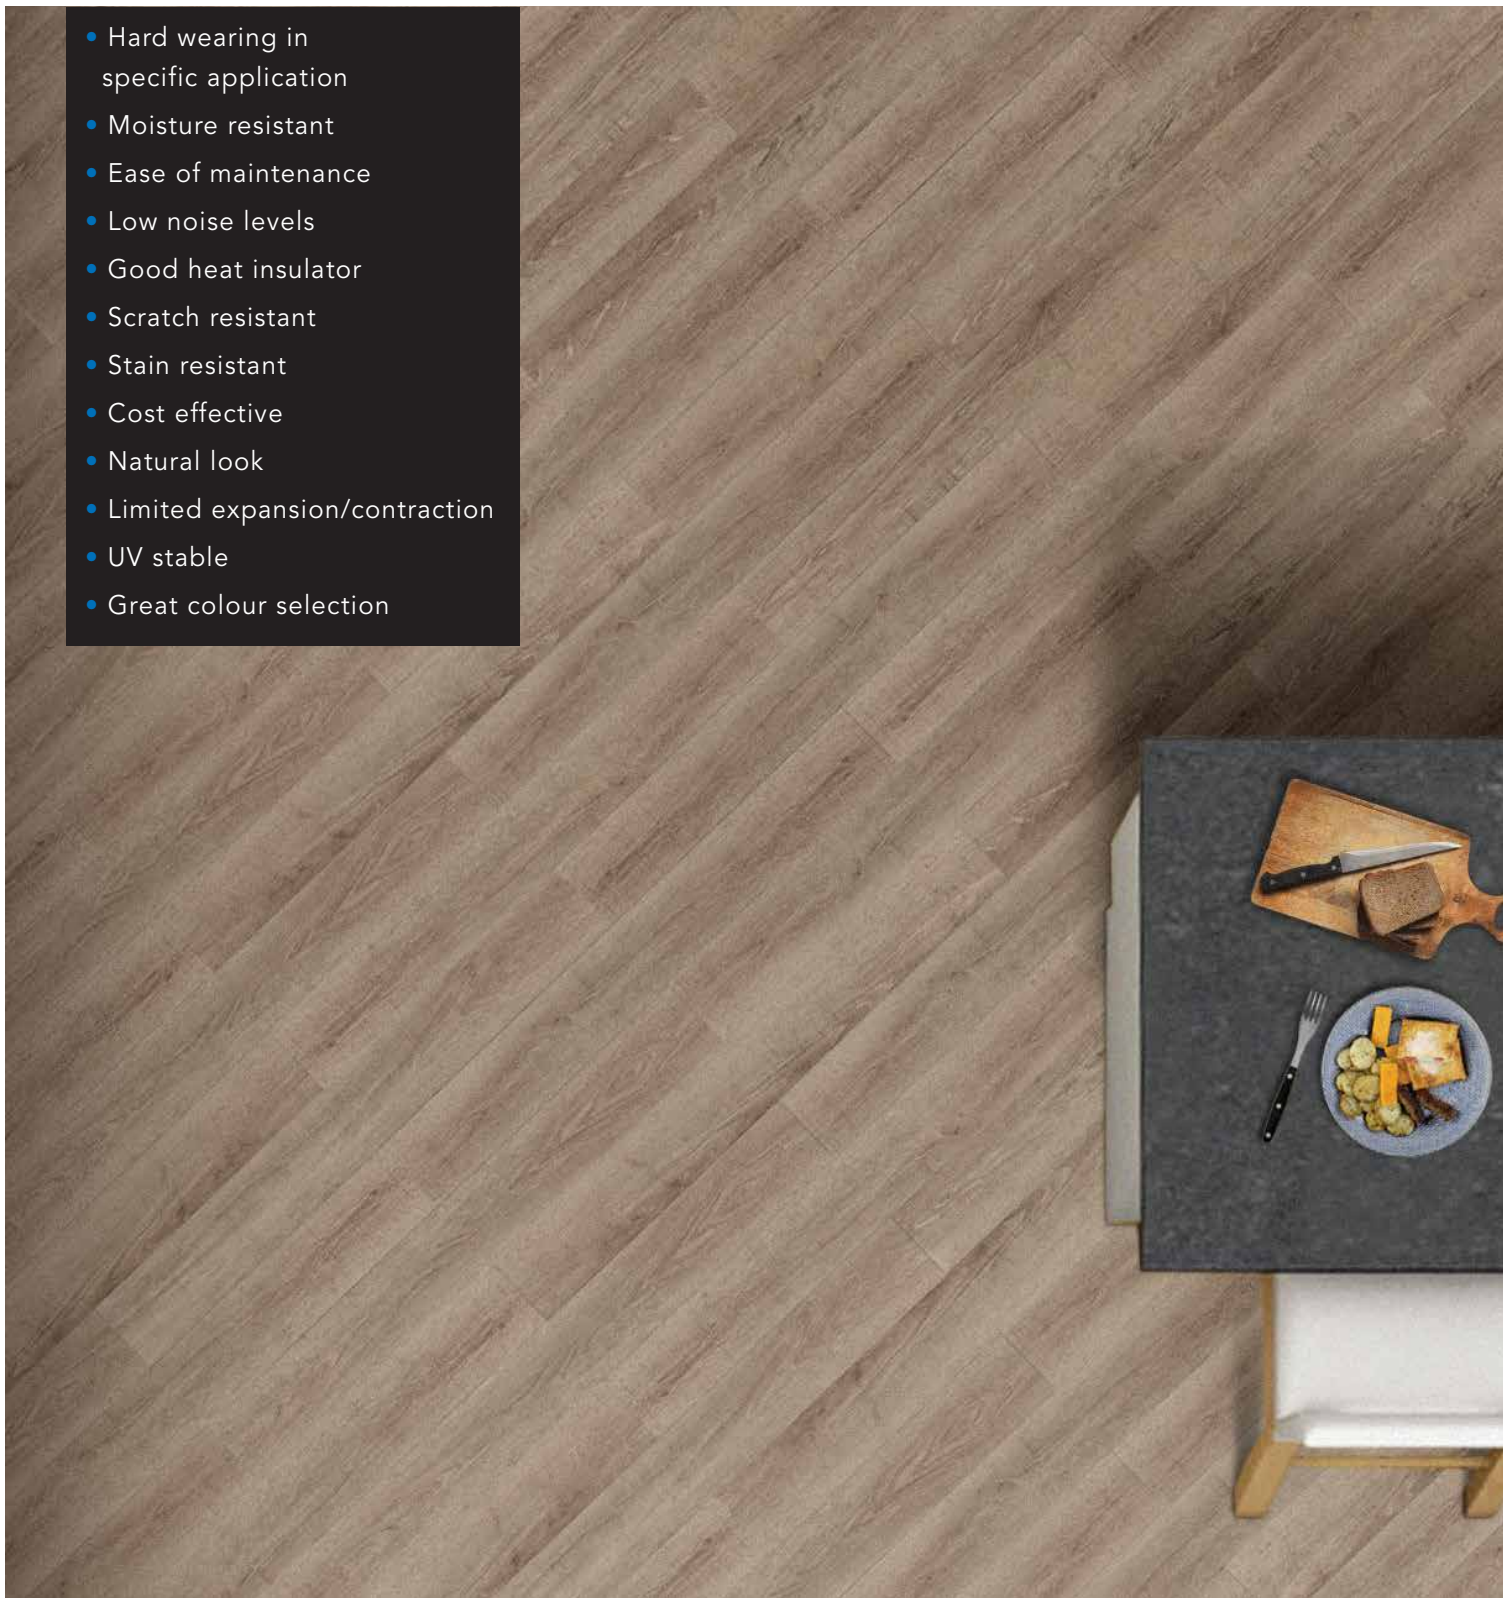




# STRUCTURE OF THE STICK-DOWN VINYL PLANK

**A WEAR LAYER**  
Antimicrobial  
Antibacterial  
Slip resistant coating  
Easy cleaning  
100% water-resistant

**B DECORATIVE PAPER**  
Unique designs

**C BACKING LAYER**  
Sound absorbing quality  
Stable and indentation resistant  
Textured grip backing

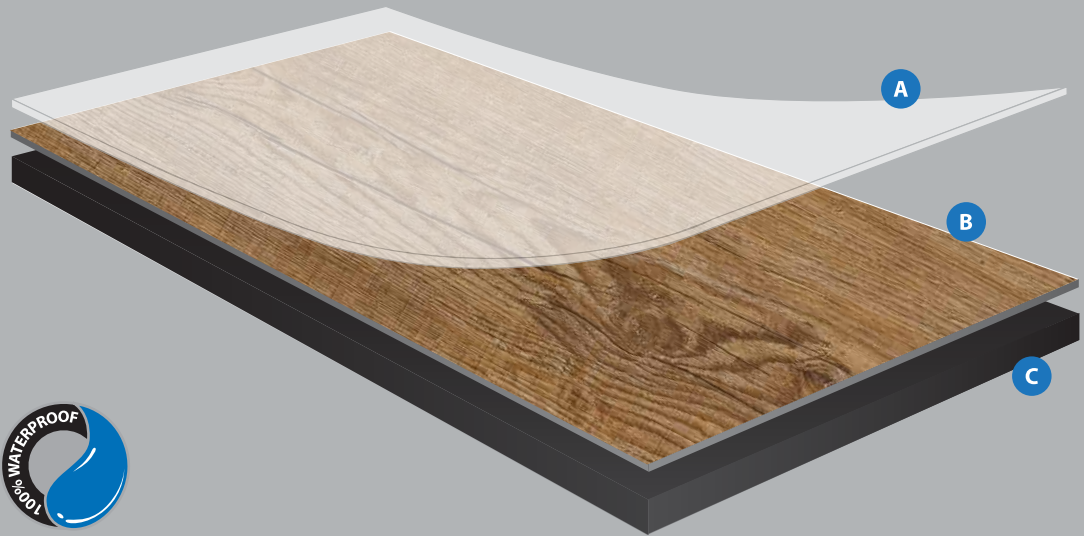

184.15 x 1219.2MM • STICK-DOWN

Durability and ease, combined with the beauty of natural wood, has made the CHARLESTON collection the ultimate and affordable choice for any residential floor. From subtle wood designs to exotic textures, CHARLESTON planks will transform any home into a cosy haven.

CHARLESTON floors are indistinguishable in appearance from real wood, but wear better, are quieter and more water resistant and easier to keep clean.





# CHARLESTON



Type of Installation	Dry Back (Stick-down)
Application	Heavy Residential
Wear Layer	0.3mm
Fire Resistance	B (fl) s1 (EN 13501-1)
Stain & Chemical Resistance	Excellent (EN 423)
Overall Thickness	2mm
Plank Size	182.88mm x 1219.2mm
Quantity per Box	3.34m <sup>2</sup>
Number of Planks	15 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)
VOC Tested	Floorscore SCS-FS-03336
Castor Chair	Pass (EN 425) (use soft non-staining wheels)





184.15 x 1219.2MM • STICK-DOWN



Despite the simulation of the hues and textures of nature, the DAVENPORT range maintains its durability, strength and performance. The 0.55mm wear layer makes it suitable for any heavy commercial floor and appealing to any trendy homeowner.



# DAVENPORT



Type of Installation	Dry Back (Stick-down)
Application	Heavy Commercial
Wear Layer	0.55mm
Fire Resistance	B (fl) s1 (EN 13501-1)
Stain & Chemical Resistance	Excellent (EN 423)
Overall Thickness	3mm
Plank Size	184.15mm x 1219.2mm
Quantity per Box	3.37m <sup>2</sup>
Number of Planks	15 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)
VOC Tested	Floorscore SCS-FS-03336
Castor Chair	Pass (EN 425) (use soft non-staining wheels)





## PLEASE NOTE

## COLOUR VARIATION MAY BE VISIBLE

Planks have been cut from an overall design; therefore, decoration and shades may vary. The random nature of wood means that significant colour and design variation is normal and indeed enhances the natural look of the planks.











Belgotex Floorcoverings Head Office  
20 Chesterfield Road, Willowton, Pietermaritzburg, 3201  
Postal address: P O Box 3228, Pietermaritzburg, 3200  
Tel: +27 (0) 33 897 7500  
Email: [belgotex@carpet.co.za](mailto:belgotex@carpet.co.za)

[www.belgotexvinyl.co.za](http://www.belgotexvinyl.co.za)

